

COMBi-RT


The Combi-RT forklift is designed for use on rough terrain, catering to your poultry and agri needs.

COMBiLiFT

LIFTING INNOVATION



COMBi-RT

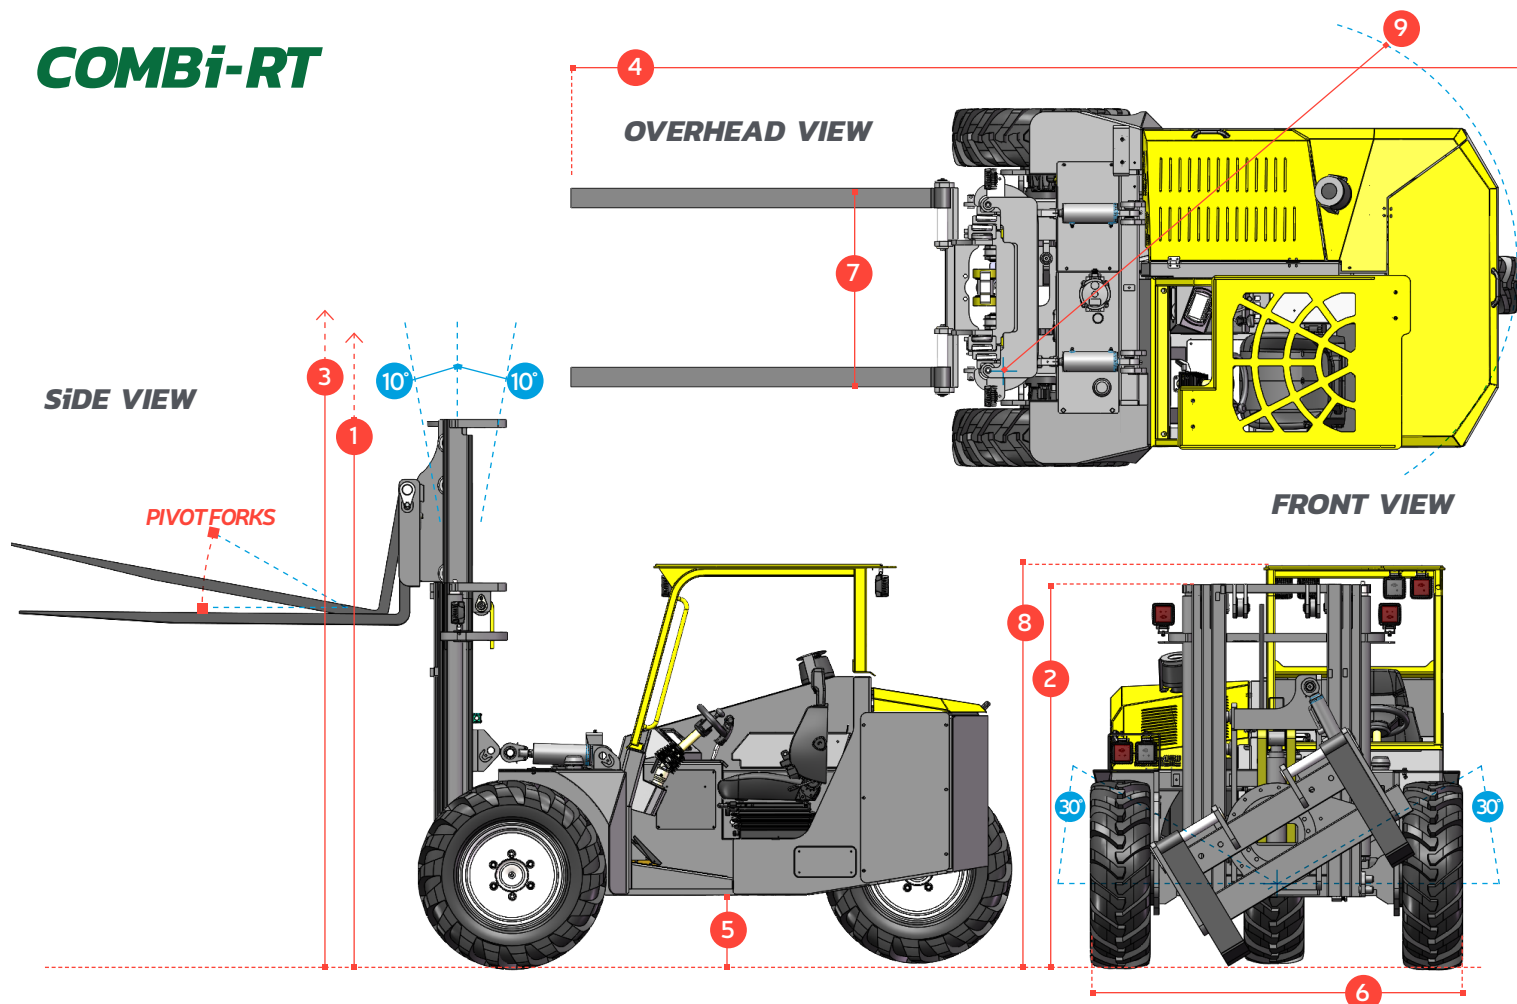

REF.	DESCRIPTION	
1	Max. Lift Height	3150 mm
2	Height Mast Closed	1800 mm
3	Max. (Mast raised)	4140 mm
4	Overall Length	4648 mm
5	Ground Clearance	305 mm

REF.	DESCRIPTION	
6	Width	2006 mm
7	Outside Spread of Fork Arms	990 mm
8	Truck Height	1880 mm
9	Turning Radius	2337 mm

DESCRIPTION	2.9 TD Deutz
Capacity	1500 kg @ 1220
Unladen Weight	4650 kg
Ground Speed	18 kmh
Gradeability	40%
Deutz 2.9 Diesel Engine	74 HP
Overall Width	2000 mm
Electrics	12 volt
Triplex Mast Lift Height	3150 mm
Pivot Fork Section	2" x 4" x 72"
Fork Rotation	30° each way
Pneumatic Tractor Grip Tires	ø 36" width 11½"
Fuel Tank Capacity	83 litres
Hydraulic Tank Capacity	75 litres

Features Include:

- 3 wheel maneuverability
- Hydrostatic all wheel drive
- Large tractor grip tyres
- Deep suspension seat
- Back up alarm
- 150 mm / 6" mast side shift
- Pivot Forks

Benefits:

- Small turning radius
- Reduced maintenance costs
- No mechanical brakes to adjust or replace
- Large ground clearance
- Diff-lock
- Offset driving position gives excellent visibility
- Ergonomically designed cabin for operator comfort

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

303 CONCORD STREET,
GREENSBORO,
NORTH CAROLINA 27406

TOLL FREE: 1-877 COMBI 56
TEL: 336-378-8884
INFO@COMBILIFT.COM

combilift.com